



2-Channel Thermocouple/RTD/Pulse Input Simulator (SFE-TRP-002)



Spectro-Flux Thermocouple / RTD / Pulse Input Combo Simulator is a device designed for the functional testing and simulation of Thermocouple, RTD or Pulse Input cards of a Control System like the PLC or DCS. The device could be kept on tabletop or mounted on a 19" industrial rack.

Model SFE-TRP-002 has 3 sections. The Thermocouple input section has been provided with 2 Precision Potentiometers to simultaneously vary 2 No.s of Milli-Volt outputs. The voltage range varies from -100mV to +100mV which can accommodate all types of Thermocouples.

The RTD Input Section also has 2 Potentiometers to simulate 2No.s of 3-Wire RTD inputs. The resistance values could be varied between 0 to 1K Ω . This is sufficient to simulate most of the temperature ranges measurable with RTD's.


The Third section on the Simulator box is designed to provide 2 pulse output signals. Two rotary selector switches have been provided to select frequency range in 10 steps like : 10Hz, 50Hz, 100Hz, 500Hz, 1KHz, 5KHz, 10KHz, 15KHz, 20KHz and 25KHz. The pulse signal has an amplitude of 15V.

The simulator box has 3 No.s of DB 25 PIN Female connectors (J1, J2 & J3) on the back side to connect the standard pre-fabricated multi-core cables (SFE-CAB-020), the other end of which get connected to the discrete wiring blocks of I/O cards. A built-in 24VDC SMPS powers the circuits. A removable transparent plate has been provided in front of the box to mark Tag Numbers corresponding to the channels assigned in a particular project.

- Industrial Quality ✧
- PCB Based Design ✧
- Ease of Maintenance ✧
- Stackable ✧
- Desktop Mountable ✧
- 19" Rack Mountable ✧



Accessories shown in the photograph may not be part of the original equipment.

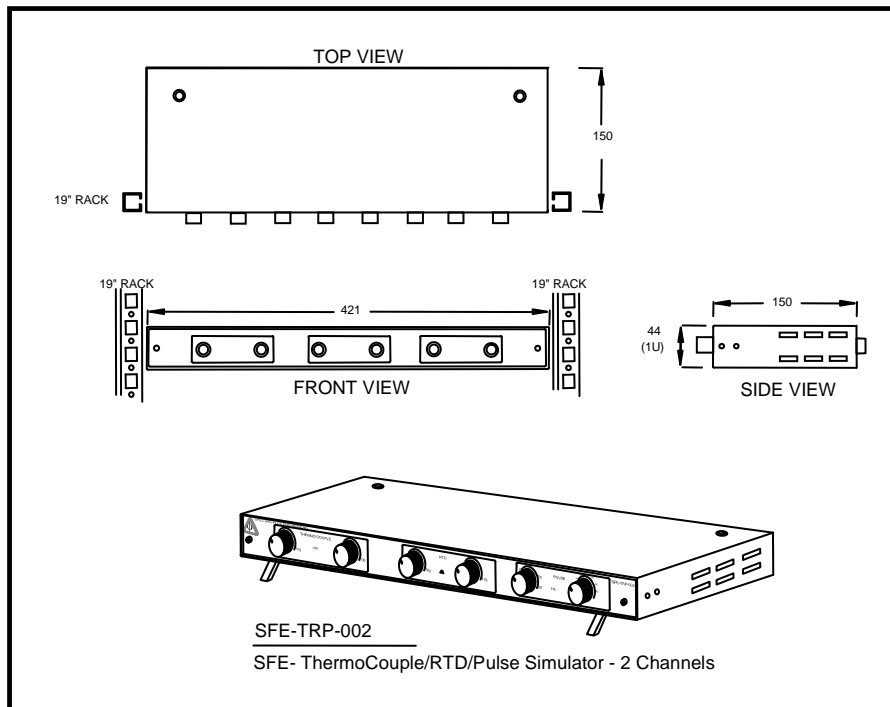

Dimensions in MM

Specifications :

Body : 1.2MM, CRCA, Powder Coated.
 Overall Size : 421MM X 44MM X 150MM
 Color : Silver Ash Grey, HN35M (Varies between models)
 Weight : Around 3Kg
 Accuracy : $\pm 2\%$
 Operating Voltage : 24VDC
 Output connections
 : DB25 Female : 3 No.s
 : 24VDC/220VAC Power Connectors
 Mounting : Table top or 19" Rack mountable
 Environmental : Class G1 (Mild). For internal use only.

Optional Accessories :

Brackets for stacking
 Brackets for 19" rack mounting
 10M, 20Core Test Cable
 19" Pedestal on wheels



For Trade Enquiries, please contact :

Spectro-Flux Engineering Pte. Ltd.

#51, Unity Centre, Bukit Batok Crescent, #06-26, Singapore 658077

Phone (65) 6316 4841 Fax (65) 6316 4842

Mobile: (65)9855 9917 / 9855 9937 / 9061 9631

NOTE

THIS EQUIPMENT IS FOR
SIMULATION PURPOSE ONLY.
NOT TO BE USED
AS A SOURCE FOR CALIBRATION

Spectro-Flux Engineering Technologies Pvt. Ltd.

#24, Doddakallasandra, Uttarahalli Hobli, Kanakapura Road,
Bangalore-560 062 INDIA

Regd. Office :

#84, 2nd Main, 3rd Cross, Ganganagar Layout, Bangalore-560 032 INDIA

Tel: (91) 80 2256 0841, Fax: (91) 80 2256 0842

Mobile: (91) 99452 75322 / 9980047018 / 93421 13231 / 98453 47737

e-mail: mail@spectro-flux.com <http://www.spectro-flux.com>